


Installing the XT6376A

J1939 Install (6-Pin / 9-Pin)


This guide covers installation steps for XT6376A vehicle tracking device, specifically for installation in a mid/heavy duty vehicle equipped with a J1939 Port.

Be prepared with the following:

XT6376A DEVICE



9 PIN OR 6 PIN CABLE*

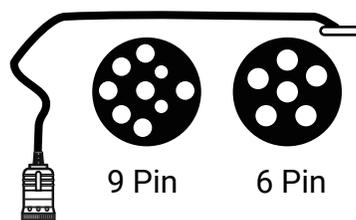

MOUNTING MATERIALS


Double Sided Tape (Dash Mount)
12" Cable Ties (Steering Panel Install)

* The 9-pin 1939 port is standard in vehicles 2006 or newer. Vehicles made in 2002-2006 have mixed coverage, and most vehicles 2002 or older require a 6 pin cable

Option 1: Dash Mount (~10 minutes)

Mounting the device on the dash provides a quick self-installation.


- 1) Plug the cable into the port, twisting to lock in place. 2) Firmly connect the device to the cable.
- 3) Secure the cable along the front edge of the dash.
- 4) Using double-sided tape, mount the device in a safe location in the middle or passenger side. The white label must be facing up.
- 5) Write down the serial # and vehicle # for activation.

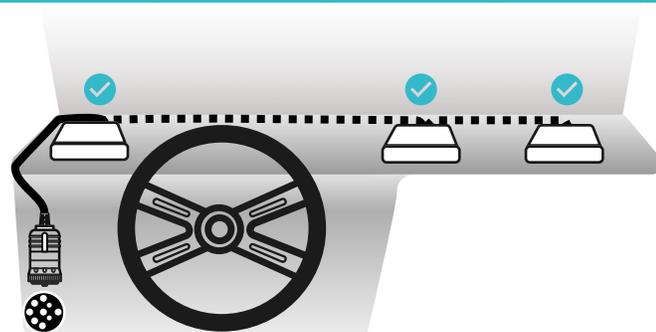

Option 2: Steering Column Panel (~45 minutes)

Mount the device behind the steering column panel when a more stealth installation is needed. Note, this process will vary by vehicle, and may not be feasible.

- 1) Plug the cable into the port, twisting to lock in place.
- 2) Firmly connect the device to the cable.
- 3) Remove the kick panel under the dash.
- 4) Run zip ties through the device mounting slots, and attach tightly where feasible.
- 5) Gather excess cable and secure.
- 6) Power on the vehicle and verify both Amber (Cellular) and Green (GPS) LED lights are flashing.
- 7) Write down the serial # and vehicle # for activation.
- 8) Replace the kick panel.

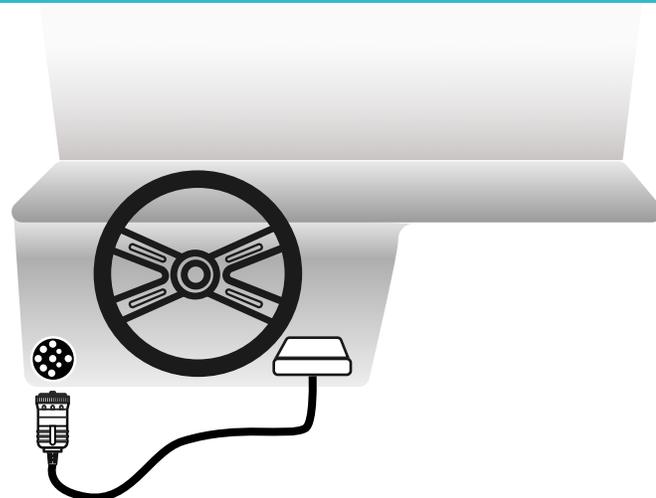

Note: Do not install in a location that is in the engine compartment, directly on top of the AM/FM radio, or in a location that would be exposed to the elements. Avoid heavy metallic surroundings.